


sf aid

ΙΑΤΡΙΚΟΣ ΕΞΟΠΛΙΣΜΟΣ
ΑΝΑΛΩΣΙΜΑ

ΔΙΕΘΕΡΜΙΕΣ



GIMA DIATERMO MB122 - mono/bipolar - 120 W

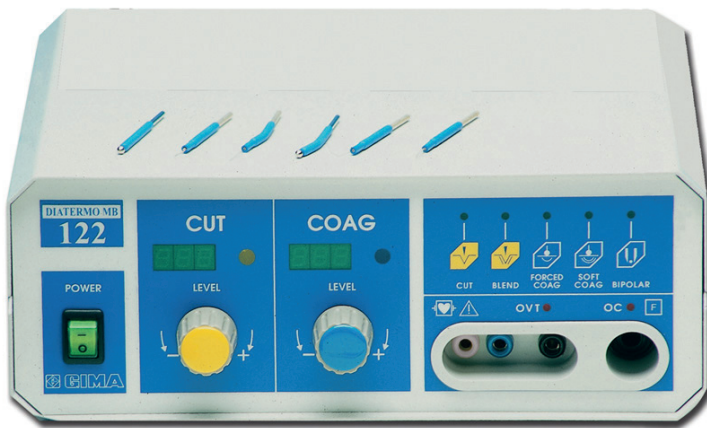

Τιμή: Επικοινωνήστε μαζί μας

Technical Specifications

- Minimum preselectable power: 0
- Level step: 1
- Maximum output power CUT (W): 120 - 250 ohm
- Maximum output power BLEND (W): 90 - 200 ohm
- Maximum output power COAG FORCED (W): 80 - 150 ohm
- Maximum output power COAG SOFT (W): 60 - 100 ohm
- Maximum output power BIPOLAR (W): 40 - 100 ohm
- Crest Factor CUT: 1.5
- Crest Factor BLEND: 2.1
- Crest Factor COAG FORCED: 2.0
- Crest Factor COAG SOFT: 1.7
- Crest Factor BIPOLAR: 1.5
- Working frequency: 600 kHz
- Weight: 7 Kg
- Size LxHxD mm: 260 x 110 x 265
- Operating voltage (switchable): 115-230
- Mains frequency (Hz): 50-60
- Fuses 230Vac (5x20) TIMED: 2x 3.15A
- Fuses 115Vac (5x20) TIMED: 2x 6.3A
- Electrical input power (VA): 300
- Electrical input current (230Vac) (A): 1.3
- Electrical input current (115Vac) (A): 2.6
- Five steps adjustable sound level (from 55- to 75dBA):
- Self-check:
- Power accuracy output warning
- Split or not split patient plate allowed
- Last working condition storing
- Electrical Class (EN60601 - 1): I CF
- MDD 93/42/EEC Class: II B
- Patient circuit: F
- Conform to EN60601-1-4 (1998)

GIMA DIATERMO MB160 - mono/bipolar - 160 W



Τιμή: Επικοινωνήστε μαζί μας

Technical Specifications

- Minimum preselectable power: 0
- Level step: 1
- Maximum output power CUT (W): 120 - 250 ohm
- Maximum output power BLEND (W): 90 - 200 ohm
- Maximum output power COAG FORCED (W): 80 - 150 ohm
- Maximum output power COAG SOFT (W): 60 - 100 ohm
- Maximum output power BIPOLAR (W): 40 - 100 ohm
- Crest Factor CUT: 1.5
- Crest Factor BLEND: 2.1
- Crest Factor COAG FORCED: 2.0
- Crest Factor COAG SOFT: 1.7
- Crest Factor BIPOLAR: 1.5
- Working frequency: 600 kHz
- Weight: 7 Kg
- Size LxHxD mm: 260 x 110 x 265
- Operating voltage (switchable): 115-230
- Mains frequency (Hz): 50-60
- Fuses 230Vac (5x20) TIMED: 2x 3.15A
- Fuses 115Vac (5x20) TIMED: 2x 6.3A
- Electrical input power (VA): 300
- Electrical input current (230Vac) (A): 1.3
- Electrical input current (115Vac) (A): 2.6
- Five steps adjustable sound level (from 55- to 75dBA):
- Self-check:
- Power accuracy output warning
- Split or not split patient plate allowed
- Last working condition storing
- Electrical Class (EN60601 - 1): I CF
- MDD 93/42/EEC Class: II B
- Patient circuit: F
- Conform to EN60601-1-4 (1998)

GIMA DIATERMO MB 120D - mono-bipolar

Technical Specifications

- Potenza max CUT: 120 W-250 O
- Potenza max BLEND: 90 W-200 O
- Potenza max FORCED COAG: 80 W-150 O
- Potenza max SOFT COAG: 60 W-100 O
- Potenza max BIPOLAR: 40 W-100 O
- Frequenza di lavoro: 600 KHz
- Elettrodo neutro: F
- Alimentazione selezionabile: 115 - 230 Vac
- Frequenza di rete: 50 - 60 Hz
- Potenza massima assorbita: 300 VA
- Dimensioni WxHxD: 254 x 104 x Peso: 5 Kg
- Controlli: Controllo circuito placca/paziente OC, controllo della potenza emessa, autodiagnosi
- Sicurezza: EN60601-1, EN60601-1-2, EN60601-2-2,
- Classificazione elettrica: I CF; MDD 93/42/EC Class: II b



Τιμή: Επικοινωνήστε μαζί μας

Features:

- Minimum invasive surgery.
- Possibility to use bipolar forceps.
- Possibility to use split neutral electrodes.
- Memorization of the last used settings.
- Power activation by pedal and/or handle.
- Digital adjustment and indication of the output power.
- Adjustment of the acoustic indicator intensity.

GIMA DIATERMO MB 160D - mono-bipolar

Technical Specifications

- Max output power CUT: 160 W-250 O
- Max output power BLEND: 120 W-200 O
- Max output power FORCED COAG: 100 W-150 O
- Max output power SOFT COAG: 80 W-100 O
- Max output power BIPOLAR: 60 W-100 O
- Working frequency: 600 KHz
- Patient circuit: F
- Selectable input voltage: 115 - 230 Vac
- Mains frequency: 50 - 60 Hz
- Electrical input power: 350 VA
- Size WxHxD: 254 x 104 x 288 mm
- Weight: 5 Kg
- Controls: Patient/Plate circuit monitoring, Output power monitoring, Self check control
- Safety: EN60601-1, EN60601-1-2, EN60601-2-2, Electrical Class: I CF,
- MDD 93/42/EC Class: II b



Τιμή: Επικοινωνήστε μαζί μας

Features:

- Minimum invasive surgery.
- Possibility to use bipolar forceps.
- Possibility to use split neutral electrodes.
- Memorization of the last used settings.
- Power activation by pedal and/or handle.
- Digital adjustment and indication of the output power.
- Adjustment of the acoustic indicator intensity.

Ηλεκτροκαυτηρίαση 1200 ° C



Τιμή: Επικοινωνήστε μαζί μας

KIRKY ΜΙΑΣ ΧΡΗΣΗΣ ΜΒ ΛΑΒΗ - αποστειρωμένη



Τιμή: Επικοινωνήστε μαζί μας

MB autoclavable χειρολαβή 100 φορές autoclavable




Τιμή: Επικοινωνήστε μαζί μας

PRIMA MB ΛΑΒΗ - 60 φορές autoclavable



Τιμή: Επικοινωνήστε μαζί μας

ΗΛΕΚΤΡΟΔΙΑ ΔΙΑΘΕΡΜΙΑΣ

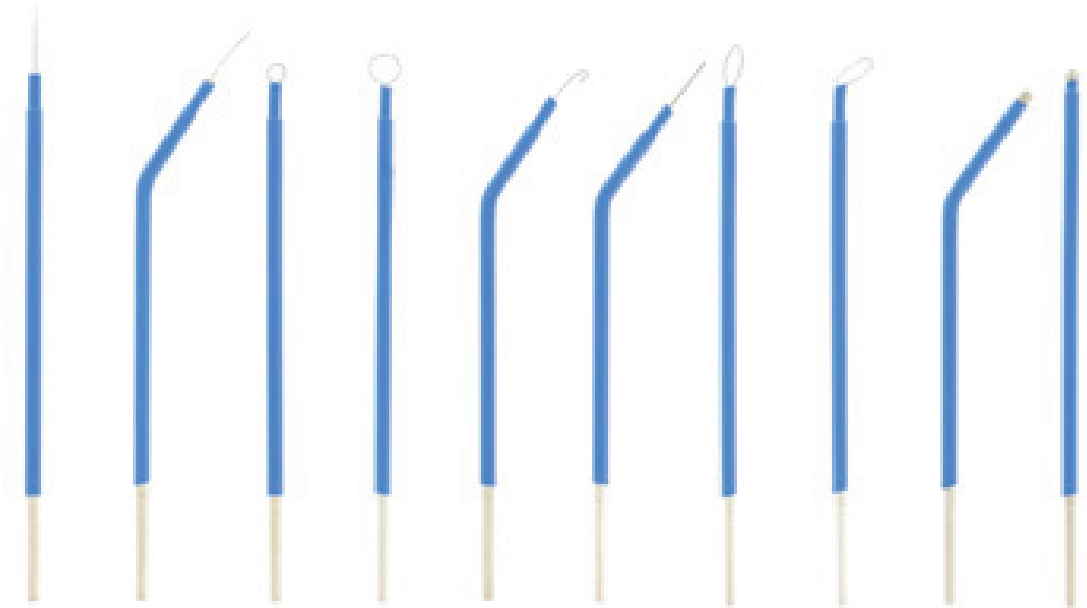

Τιμή: Επικοινωνήστε μαζί μας



Αισχύλου 83, Νίκαια
Τηλ.: 211 4112707 - 6939 080534, 6931 981515
E-mail: info@sfaid.gr - Site: www.sfaid.gr